



①




②

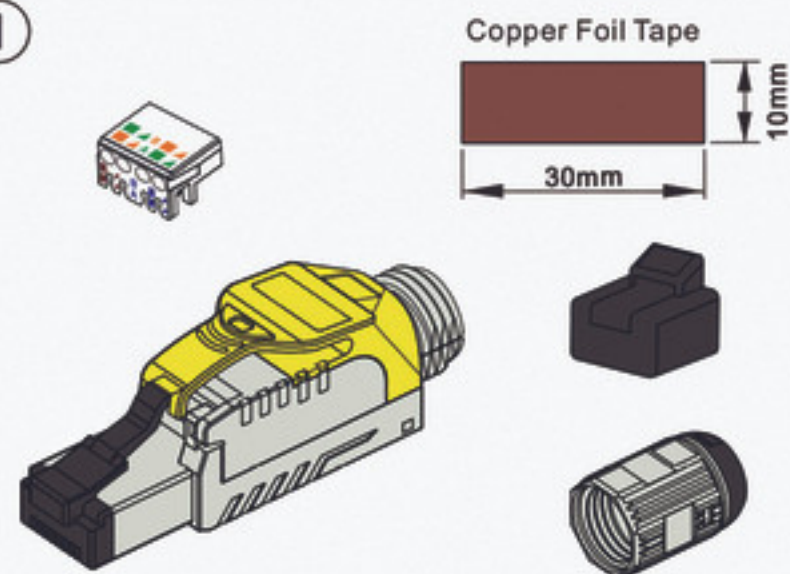


③

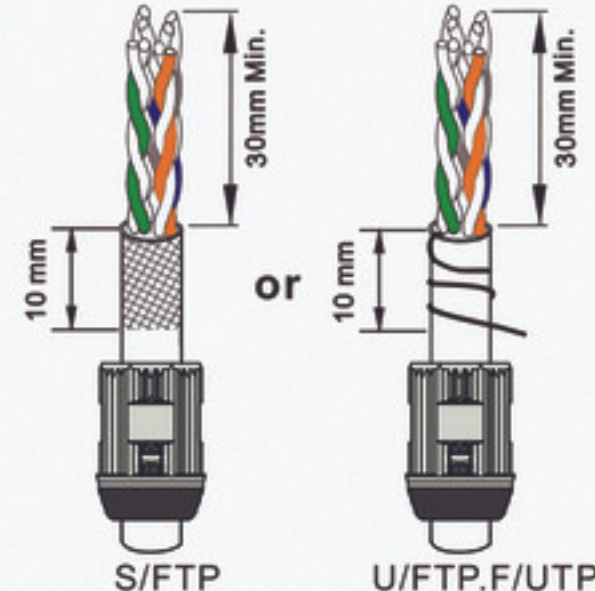


④

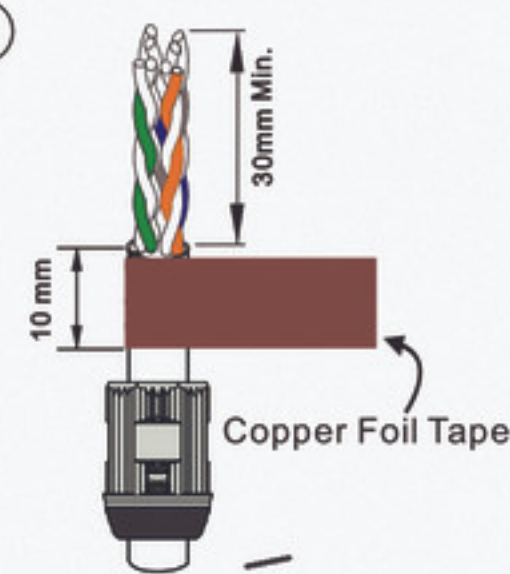


⑤

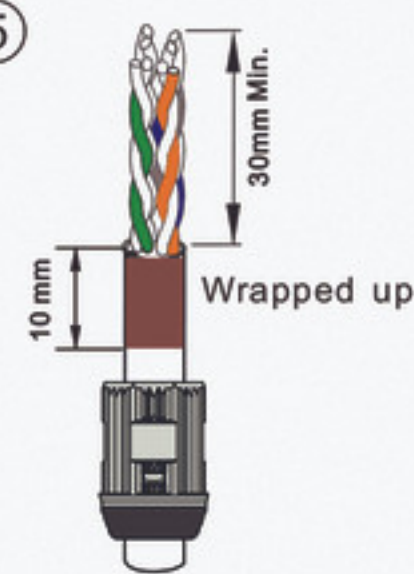


⑥

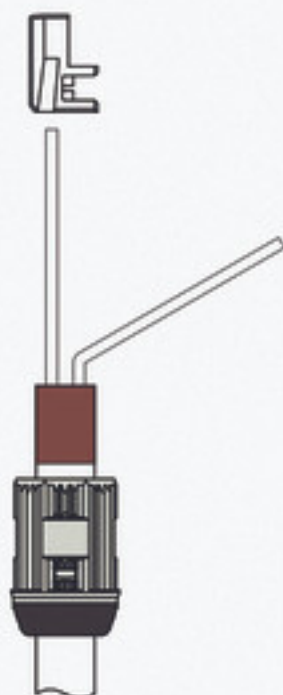

⑦

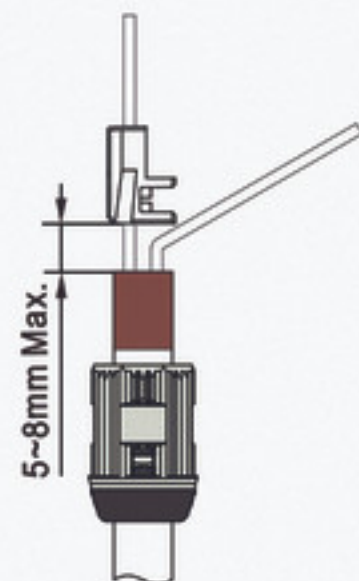


⑧

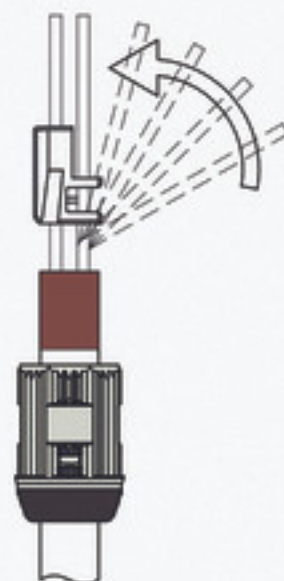


⑨

Cut front row wires flush

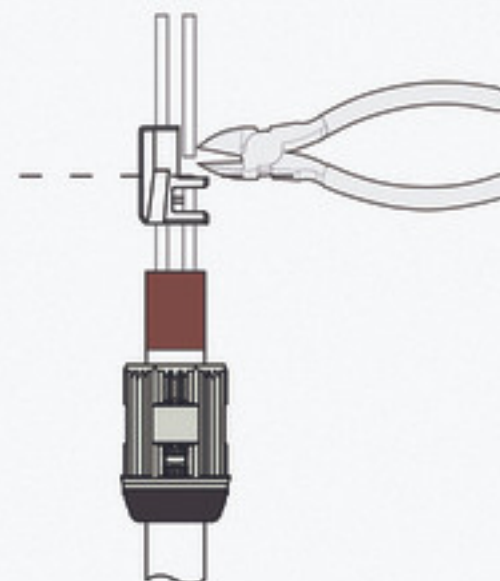


⑩


Cut rear row wires flush

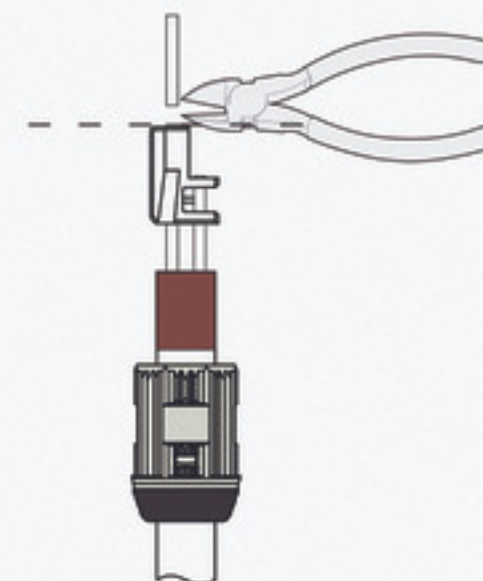


⑪

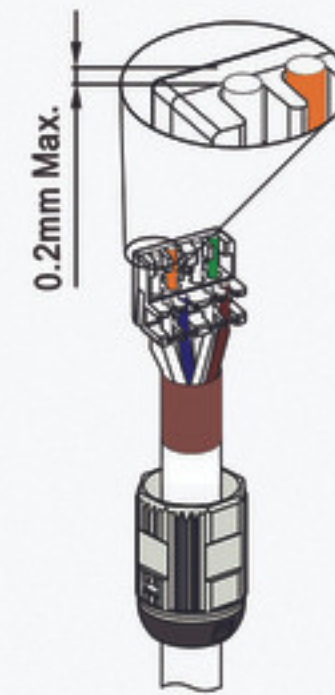


⑫

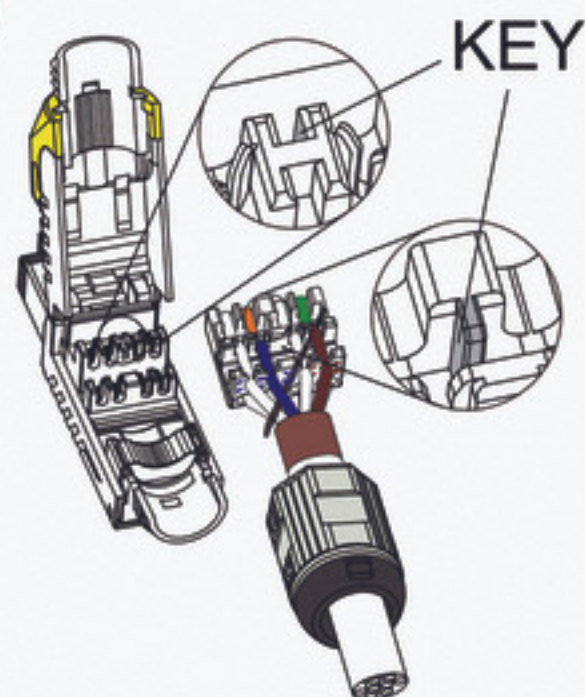


⑬

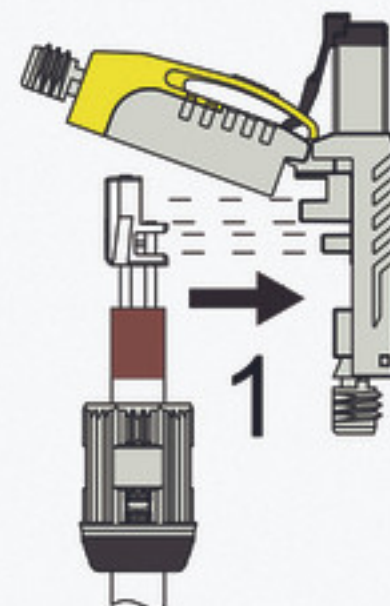

⑭

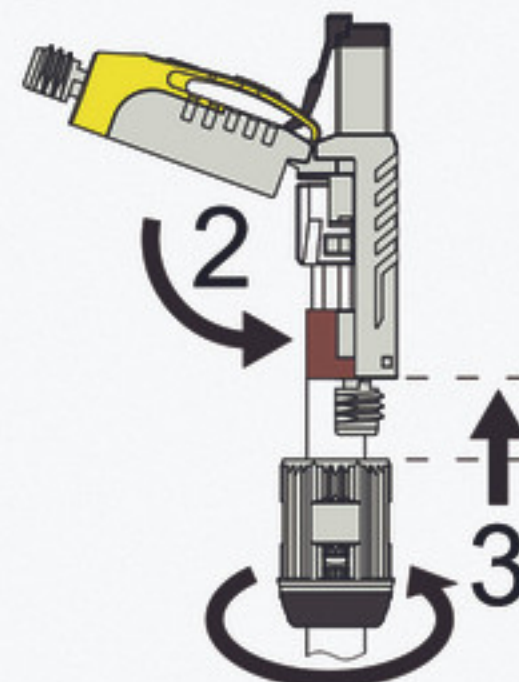

⑮

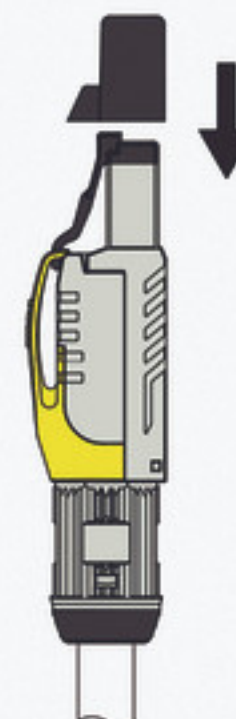

⑯

Legend
W White
G Green
O Orange
BL Blue
BR Brown

1	2	3	4	5	6	7	8
W-G	G	W-O	BL	W-BL	O	W-BR	BR

Pin assignment T568A

1	2	3	4	5	6	7	8
W-O	O	W-G	BL	W-BL	G	W-BR	BR

Pin assignment T568B

	Solid	Stranded	Cable (O.D.)
C6A	23~26AWG	23~26AWG	6.0~7.5mm
C8	22~24AWG	22~24AWG	7.0~8.5mm